


**ROCK BUCKET
GRAPPLE**



**EQUIPMENT BUILT
TO LAST**

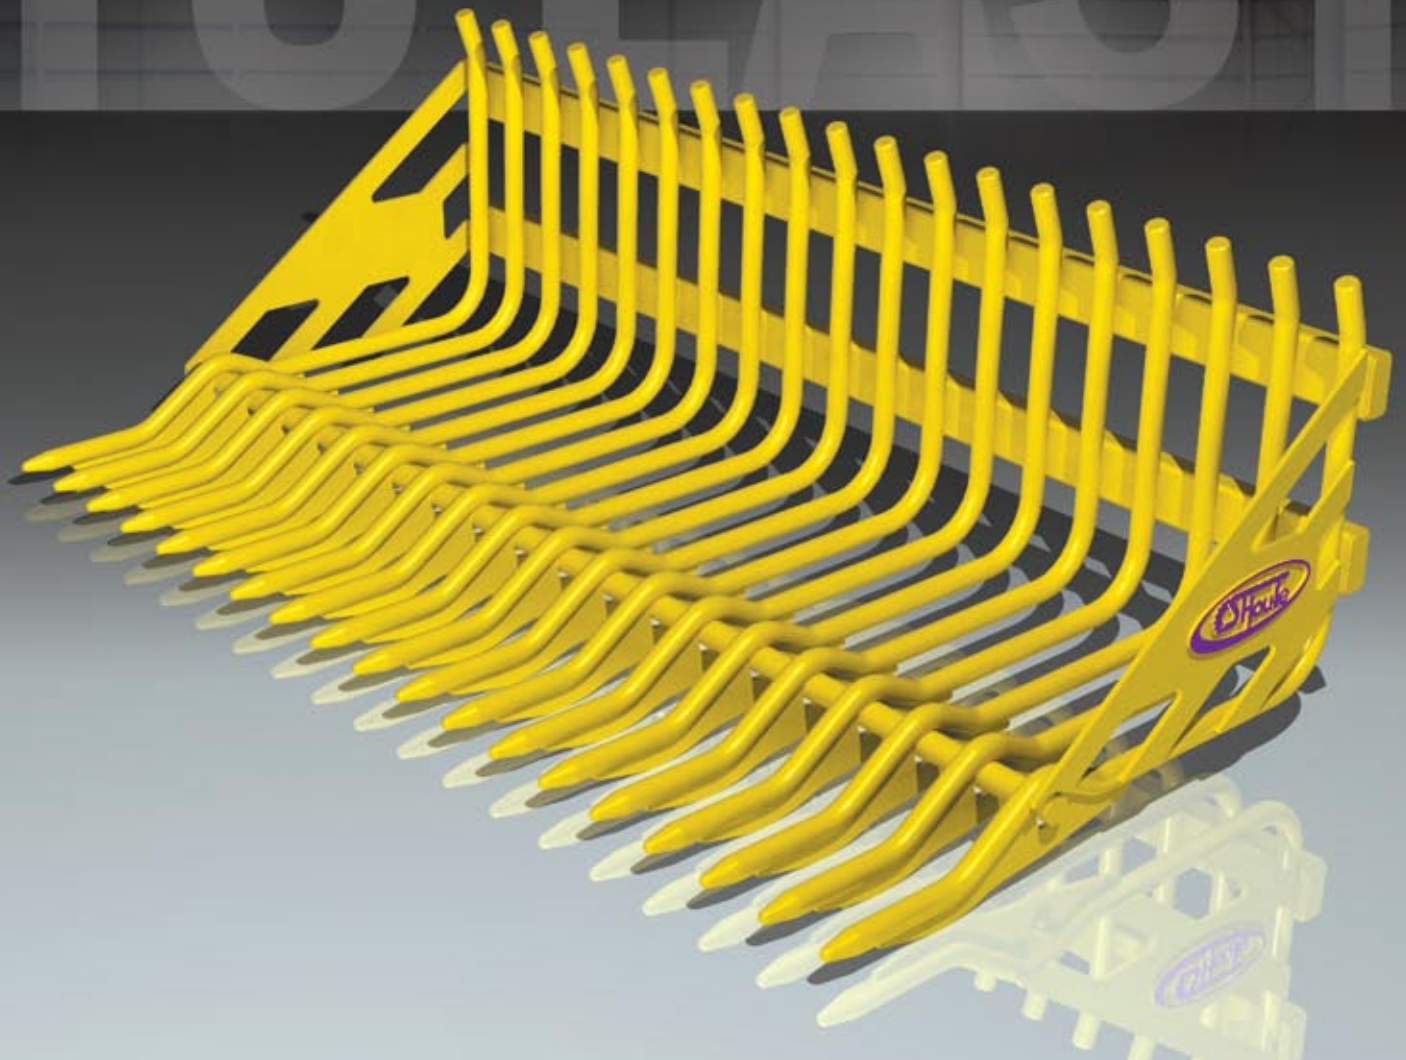

www.shoule.com

TOUGH

BB MODEL FOR SKID STEER LOADER

The BB Model is made for tractors ranging from 30 to 60 HP or for skid-steer loaders. The tines are 1 1/8" (2,8 cm) in diameter and are spaced 1 3/4" (4,5 cm) apart, making this bucket ideal to pick up rocks which are on the surface of the ground.



EQUIPMENT BUILT TO LAST




B MODEL FOR TRACTOR

The B Model is suitable for tractors ranging from 60 to 100 HP, but will also fit most skid-steer loaders, small loaders and backhoes. Its tines are 1 1/4" (3,1 cm) in diameter, and are spaced 2 1/2" (6,4 cm) apart. This bucket is intended to scoop rocks from the surface of the ground, but with care and common sense, can also be used for light digging.



Model	Width	Length of tines	Height of tines	Weight	Number of tines	Tine Diameter	Spacing	Tensile Strength
BB Model for skid steer loader (30 to 60 HP)								
BB4	48 in / 122 cm	38 in / 97 cm	24 in / 61 cm	405 lbs / 184 kg	17	1 1/8 in / 2.9 cm	1 3/4 in / 4.4 cm	101,250 lbs / 45,926 kg
BB5	60 in / 152 cm	38 in / 97 cm	24 in / 61 cm	520 lbs / 236 kg	20	1 1/8 in / 2.9 cm	1 3/4 in / 4.4 cm	101,250 lbs / 45,926 kg
BB6	72 in / 183 cm	38 in / 97 cm	24 in / 61 cm	650 lbs / 295 kg	23	1 1/8 in / 2.9 cm	1 3/4 in / 4.4 cm	101,250 lbs / 45,926 kg
B Model for tractor (60 to 100 HP)								
B5	60 in / 152 cm	42 in / 107 cm	24 in / 61 cm	620 lbs / 281 kg	17	1 1/4 in / 3.2 cm	2 1/2 in / 6.3 cm	112,500 lbs / 51,029 kg
B6	72 in / 183 cm	42 in / 107 cm	24 in / 61 cm	720 lbs / 327 kg	20	1 1/4 in / 3.2 cm	2 1/2 in / 6.3 cm	112,500 lbs / 51,029 kg
B7	84 in / 213 cm	42 in / 107 cm	24 in / 61 cm	825 lbs / 374 kg	23	1 1/4 in / 3.2 cm	2 1/2 in / 6.3 cm	112,500 lbs / 51,029 kg
B8	96 in / 244 cm	42 in / 107 cm	24 in / 61 cm	925 lbs / 420 kg	26	1 1/4 in / 3.2 cm	2 1/2 in / 6.3 cm	112,500 lbs / 51,029 kg

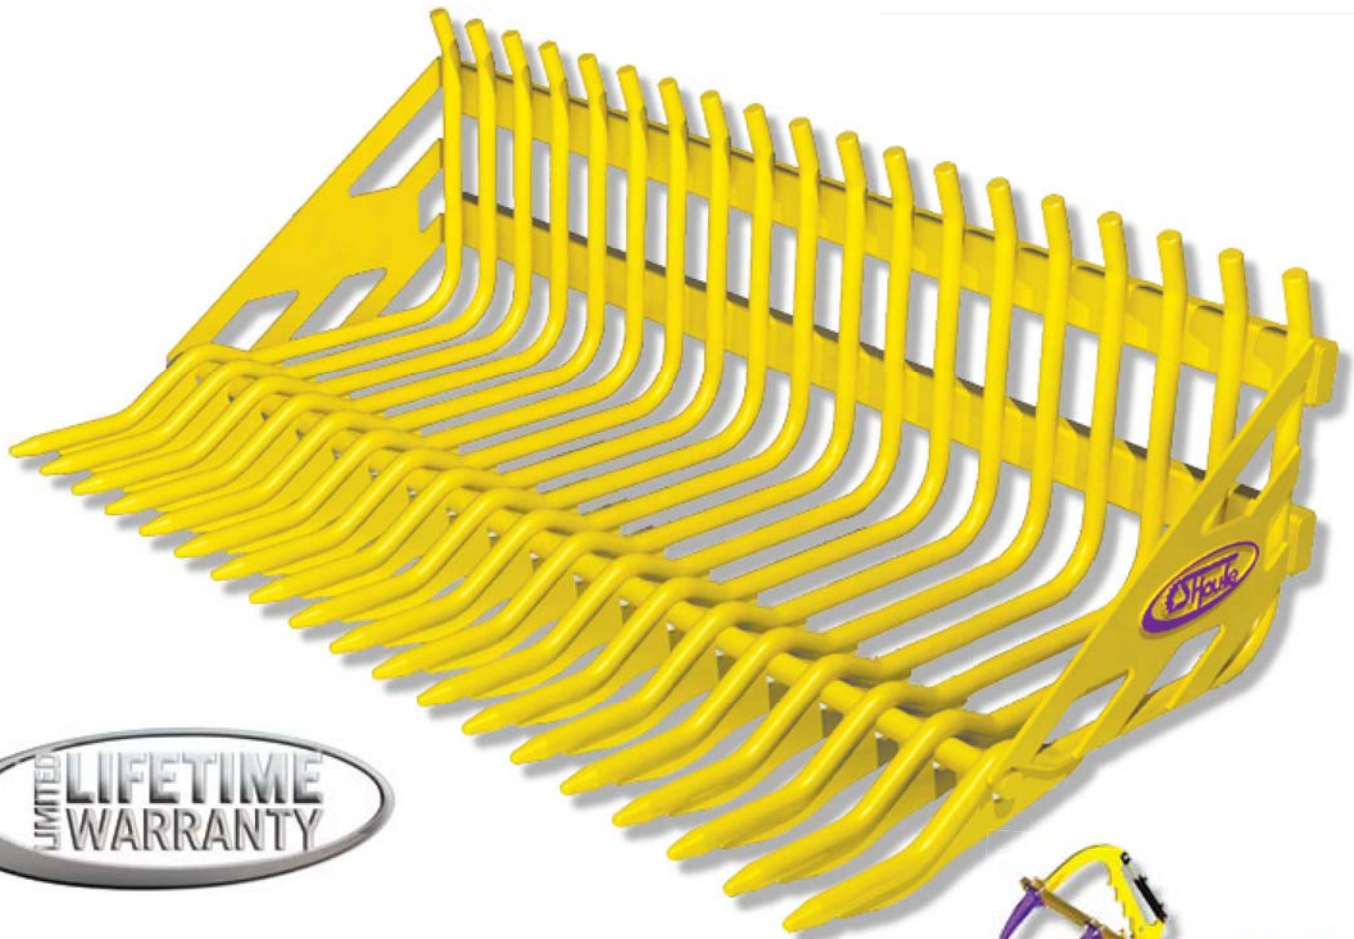

THE ORIGINAL ROCK BUCKET TOUGH, SOLID, VERSATILE

For all types of tractors, from 48 in (122 cm) to 108 in (274 cm) wide. The hitches make it fast and easy to hook up. A **FIRST IN ITS CATEGORY**, our rock bucket offers **GREAT STRENGTH** and flexibility as well as **AMAZING DURABILITY**.

Fabrication S. Houle has been making the original rock bucket since 1994. Our rock bucket was the **FIRST OF ITS KIND**. Over the years, rigorous research and development efforts have resulted in the development of 17 different models **TO SUIT EVERY JOB AND TRACTOR**. Designed to


pick up rocks, roots, tree stumps, bales of hay, manure and debris of any kind, our rock bucket is also designed to fit any farm tractor, backhoe, skid steer or industrial loader. The rock bucket accepts many different types of attachments (bolt or weld on), and can easily be equipped with our grapple, for a secure hold on any load you wish to transport. A first in its category, our rock bucket is **MADE OF SPRING STEEL**, so you can be assured of its great strength and flexibility, as well as amazing durability.




**TENSILE STRENGTH
OF UP TO 157,500 LBS
(71,440 KG)**

SEVERAL MODELS OF HITCHES


We have a wide range of quick hitches that are easy to install and **ADAPTABLE** to all types of tractors and compact loaders.



ALO



JD-640



BOBCAT

SOLID

HB MODEL FOR TRACTOR

The HB Model is intended for use with tractors ranging from 85 to 200 HP. With tines that are 1 1/2" (3,8 cm) in diameter and spaced 3" (8 cm) apart, this bucket will scoop rocks from the surface of the ground as well as dig up moderate sized rocks from the soil. To do this efficiently, simply position the bucket so it is centered in front of the rock, to provide the most leverage.



**MADE FROM
SPRING STEEL**



SHB MODEL INDUSTRIAL

The SHB Model is built for industrial loaders and can also be mounted on any large backhoe loader. This bucket's tines are 1 3/4" (4.5 cm) in diameter, are spaced 4" (10 cm) apart and are reinforced with 3/4" (2 cm) high strength steel plating underneath. With the strength of this bucket, you can dig up, pick up and move any type of debris.




Model	Width	Length of tines	Height of tines	Weight	Number of tines	Tine Diameter	Spacing	Tensile Strength
HB Model for tractor (85 to 200 HP)								
HB5	60 in / 152 cm	40 in / 102 cm	24 in / 61 cm	660 lbs / 300 kg	13	1 1/2 in / 3.8 cm	3 in / 8 cm	135,000 lbs / 61,235 kg
HB6	72 in / 183 cm	40 in / 102 cm	24 in / 61 cm	750 lbs / 340 kg	16	1 1/2 in / 3.8 cm	3 in / 8 cm	135,000 lbs / 61,235 kg
HB7	84 in / 213 cm	40 in / 102 cm	24 in / 61 cm	880 lbs / 400 kg	19	1 1/2 in / 3.8 cm	3 in / 8 cm	135,000 lbs / 61,235 kg
HB8	96 in / 244 cm	40 in / 102 cm	24 in / 61 cm	1,015 lbs / 460 kg	22	1 1/2 in / 3.8 cm	3 in / 8 cm	135,000 lbs / 61,235 kg
HB9	108 in / 274 cm	40 in / 102 cm	24 in / 61 cm	1,105 lbs / 501 kg	25	1 1/2 in / 3.8 cm	3 in / 8 cm	135,000 lbs / 61,235 kg
SHB Model - Industrial (200 HP and higher)								
SHB7	84 in / 213 cm	46 in / 117 cm	32 in / 81 cm	1,950 lbs / 885 kg	15	1 3/4 in / 4.4 cm	4 in / 10 cm	157,500 lbs / 71,441 kg
SHB8	96 in / 244 cm	46 in / 117 cm	32 in / 81 cm	2,075 lbs / 942 kg	17	1 3/4 in / 4.4 cm	4 in / 10 cm	157,500 lbs / 71,441 kg
SHB9	108 in / 274 cm	46 in / 117 cm	32 in / 81 cm	2,205 lbs / 1,001 kg	19	1 3/4 in / 4.4 cm	4 in / 10 cm	157,500 lbs / 71,441 kg

POWERFULL

GRAPPLE

Fits all our rock bucket models

**TENSILE
STRENGTH:
95,000 PSI.**

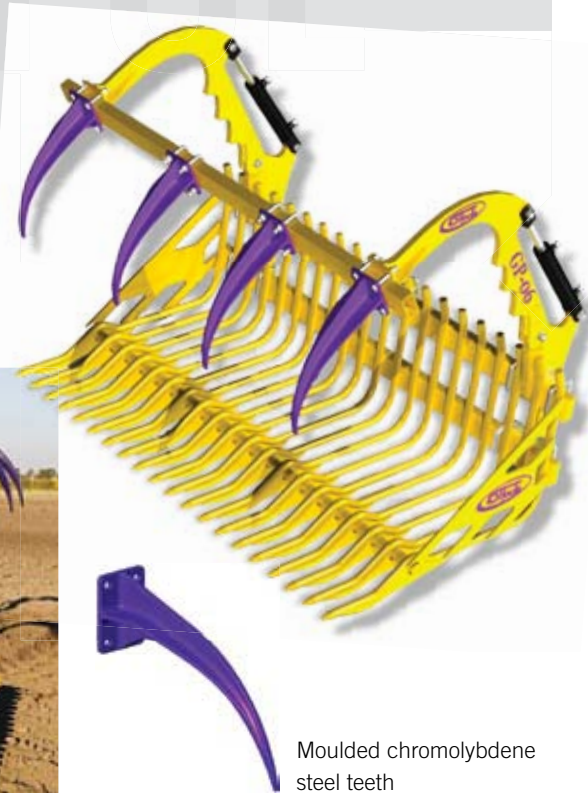

Moulded chromolybdene steel teeth



GP-06 MODEL

We are proud to introduce our 6th generation grapple — the GP-06. The result of continuous improvements, the GP-06 is **ADAPTABLE TO ALL OUR 5' TO 9' (1.5 X 2.7 M) ROCK BUCKET MODELS**. With its large load capacity, the GP-06 is a versatile tool that will assist you **IN A NUMBER OF DIFFERENT TASKS**.

SGP-01 MODEL

This grapple is designed for all your heavy-duty jobs. Made to be used with our SHB series rock buckets, the SGP-01 is equipped with two powerful hydraulic cylinders (3 in. / 8 cm diam., 6 in. / 15 cm stroke), and highly resistant **RT-400 STEEL** teeth.

The **SMART** grapple design

Our grapple teeth are made of moulded chromolybdene steel; they offer **GREAT RESISTANCE** and increased rigidity. In addition, all grapple teeth are replaceable.

Our grapple hooks up to your Houle rock bucket quickly and safely. The hydraulic cylinder pins as well as all pivot points are greaseable for **EXTENDED LIFE**.



Hydraulic Cylinders			Teeth		Width	Opening	Tensile Strength	Weight
Number	Diameter	Stroke	Thickness	Number				
GP-06 Model								
2	2 in / 5 cm	10 in / 25 cm	5/8 in / 1.6 cm	4	5 to 9 ft (1.5 to 2.7 m)	62 in (157 cm)	95,000 lbs / in ²	390 lbs (177 kg)
SGP-01 Model								
2	3 in / 8 cm	6 in / 15 cm	5/8 in / 1.6 cm	4	7 to 9 ft (2.1 to 2.7 m)	53 in (135 cm)	95,000 lbs / in ²	465 lbs (211 kg)

**TO LEARN MORE ABOUT OUR PRODUCTS:
DIAL 1 888 404-4380 OR VISIT WWW.SHOULE.COM**



WE ARE ACCESSIBLE WORLDWIDE

Why is our rock fork the best seller on the market?

- We were the **FIRST** to manufacture this type of fork.
- It has made our **REPUTATION** as #1.
- No imitation of this product offers as much strength.
THE PROOF: We are the only company to offer a Lifetime Warranty.

As part of our commitment to continual improvement of our products, we reserve the right to modify the products presented in this brochure without notice.



1 YEAR
WARRANTY
PARTS AND LABOR

FAST
DELIVERY 



Fabrication S. Houle inc.

300 Industriel Blvd., P.O. Box 750, Saint-Germain (Quebec) CANADA J0C 1K0
Tel.: 819 395-4380 • Toll free: 1 888 404-4380 • Fax: 819 395-5516
E-mail: info@shoule.com

www.shoule.com

